



KONEKTOR

Informacja: **42 671 98 07** / 512 093 509 / sklep@konektor5000.pl

Telefon ul. Brukowa 16, Łódź

ZASTONE D900 radiotelefon ręczny 5W DMR UHF 400-470MHz

Producent: ZASTONE

Cena brutto: 500.00 zł

Cena netto: 406,5 zł

[Kup w sklepie konektor5000.pl](https://sklep.konektor5000.pl)

Opis produktu

Zastone D900

radiotelefon przenośny DMR UHF 400-470MHz

działa w DMR / MOTOTRBO

Image not found or type unknown

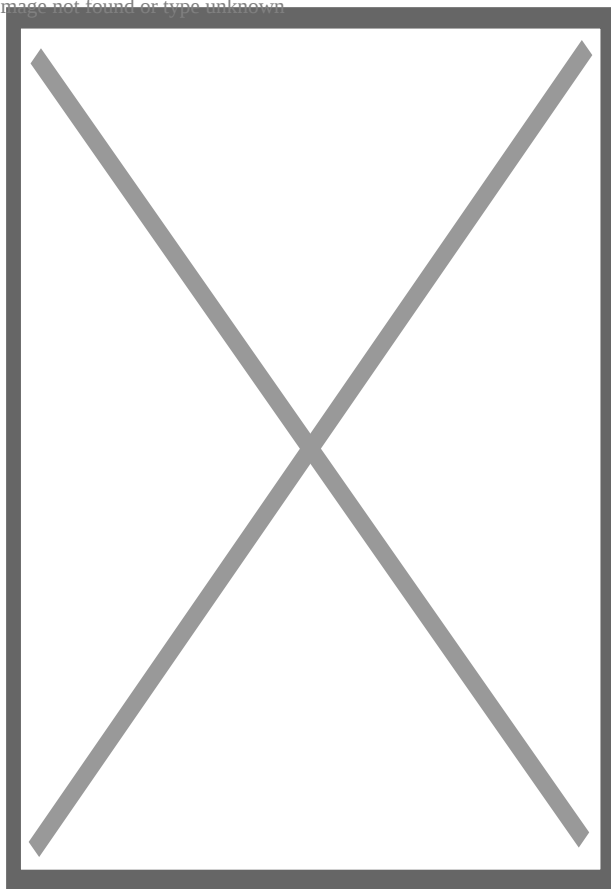


Image not found or type unknown

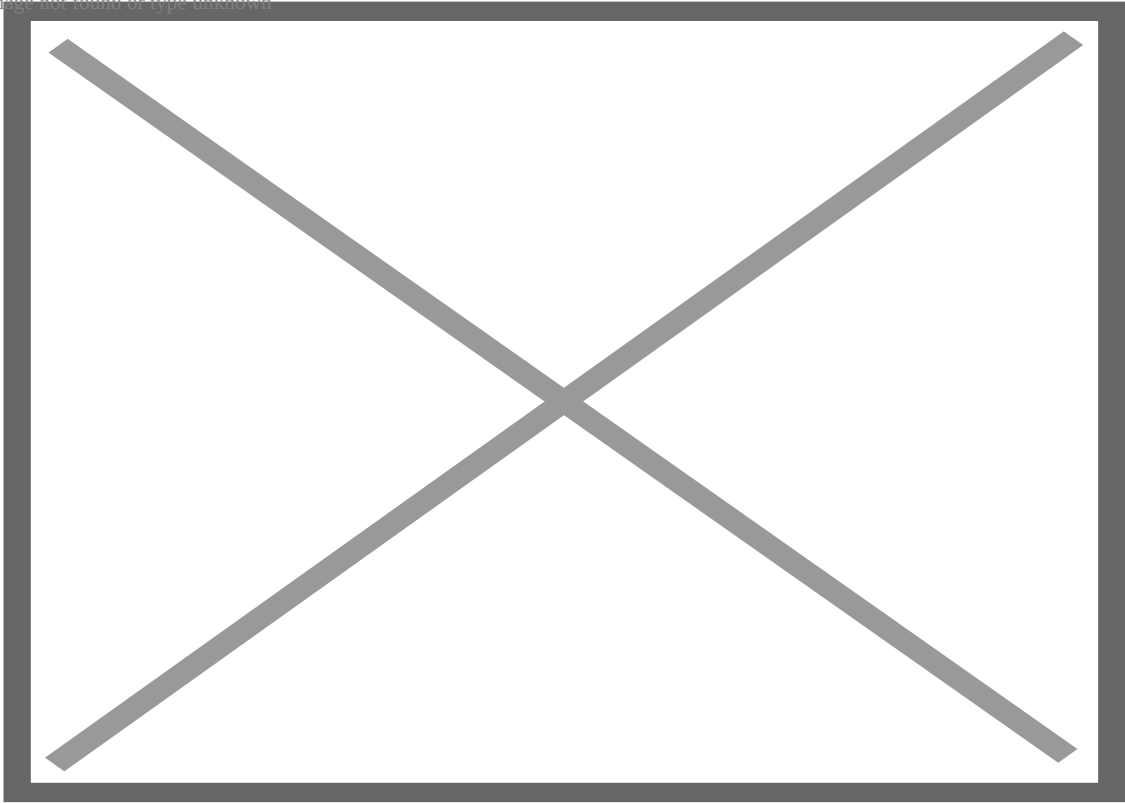


Image not found or type unknown

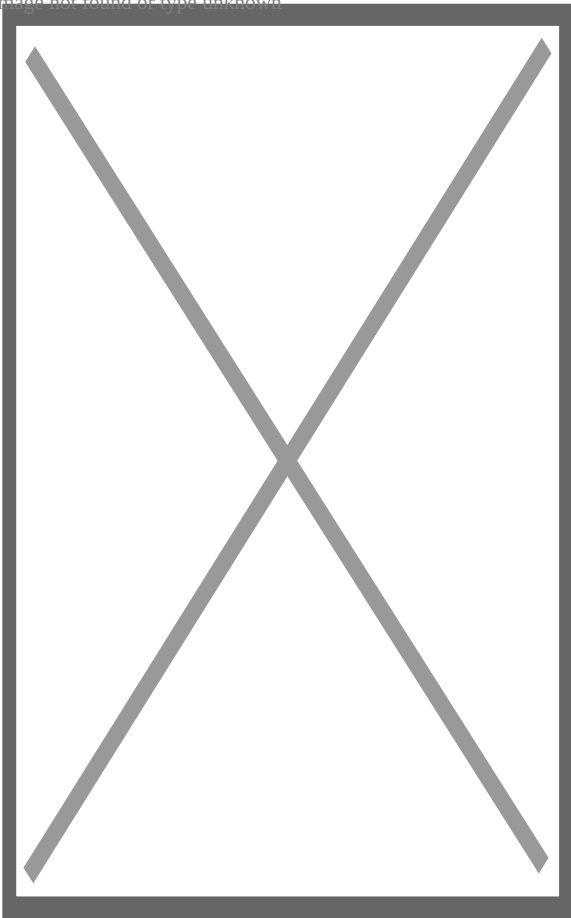


Image not found or type unknown


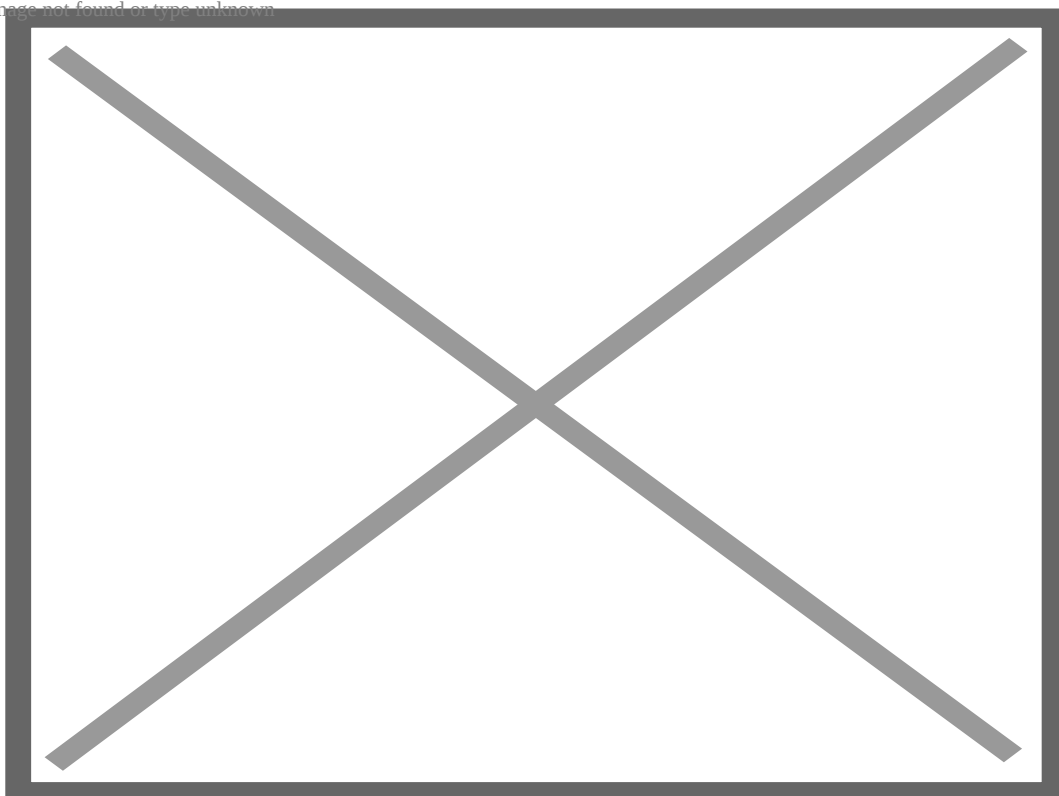


Image not found or type unknown

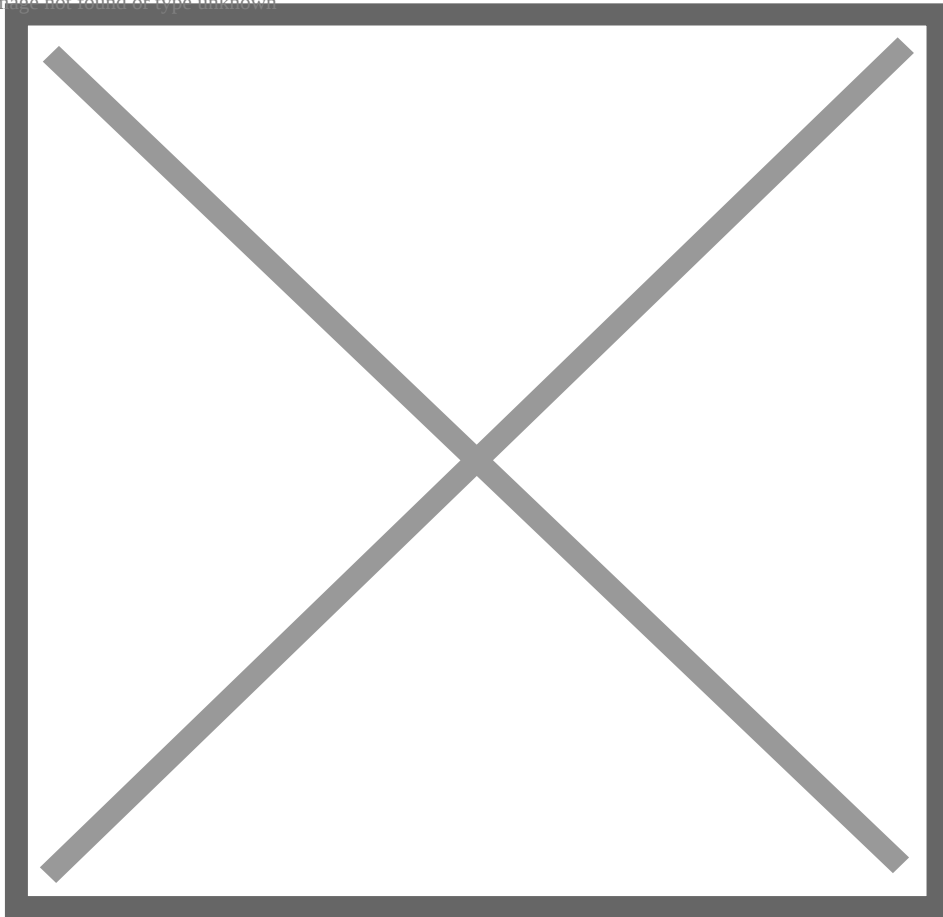

Function

- 1000 channels
- Remote kill/stun/activate
- Voice prompt
- Power-on protection
- Color LCD display
- Text messages in digital mode
- Encryption function
- Built-in CTCSS/DCS
- Up to 1000 channels
- Priority scan
- Complying with digital protocol ETSI TS 102 361-1,-2,-3
- DTMF decoding and encoding
- Updated software available for new features
- Private call, group call, all call in digital mode
- Operate in both Digital & Analogue mode

Allows easily migrate from analog to digital

Provide clearer voice communications in digital mode, throughout the coverage

Specification

General Specifications

Frequency range

UHF:400-470MHz

Channel

1000 Channels

Channel Spacing

12.5KHz

Operating Voltage

7.5V

Battery Capacity

Li-ion 2000mAh

Operating Temperature

-30°C+60°C

Antenna Impedance

50 ohm

Audio Output Power

$\leq 1000\text{mW}$

Dimension(H*W*D)

131*61*36(Not Including Antenna)

Weight

258g

Transmitter

Output power

$\leq 5\text{W(HI)}$, $\leq 1\text{W(Low)}$

Frequency Stability

$\pm 1.0\text{PPM}$

Adjacent Channel Power

$\leq -60\text{dB}$

Free Time Slot Power

$\leq 57\text{dBm}$

Hum and Noise

-40dB 12.5KHz

Spurious Radiation

Atenna:9KHz-1GHz $\leq -36\text{dBm}$

1GHz-12.75GHz $\leq -30\text{dBm}$

FM Modulation Mode

12.5KHz: F3E

4FSK Digital Mode

12.5KHz(data only):7K60FXD

12.5KHz(data +voice):7K60FXE

Modulation Maximum Deviation

2.5KHz12.5KHz

Nonactive Slot Power

-57dBm

Digital Protocol

ETSI TS 102 361-1 -2 -3

Vocoder Type

AMBE+2TM

Audio Response

+1dB~-3dB

Modulation BER(Bit Error Rate)

$\leq 5\%$

Receiver

Analog sensibility

0.35 μ V/-116dBm(20dB SINDA)

0.22 μ V/-120dBm(Type)

Digital sensibility

0.3 μ V/-117.4dBm (BER 5%)

0.7 μ V/-110dBm (BER 1%)

Co-channel Rejection

≥ -12 dB

Adjacent Channel Selectivity

TIA603C:65dB ETSI:60dB

Spurious Response

TIA603C:75dB ETSI:70dB

Rated audio power

1W

Audio response

+1dB~-3dB

Rated audio distortion

3%(Type)

Spurious Radiation

Antenna:9KHz-1GHz <=-57dBm

1GHz-12.75GHz <=-47dBm





Karta informacyjna, nie stanowi oferty sprzedaży. Wygenerowano 2024-04-29 05:26